
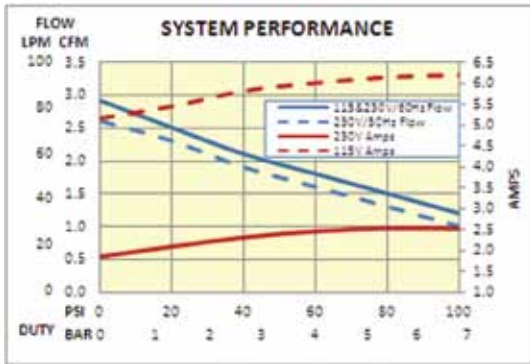


JUN-AIR® 85R-4P Compact Compressor System

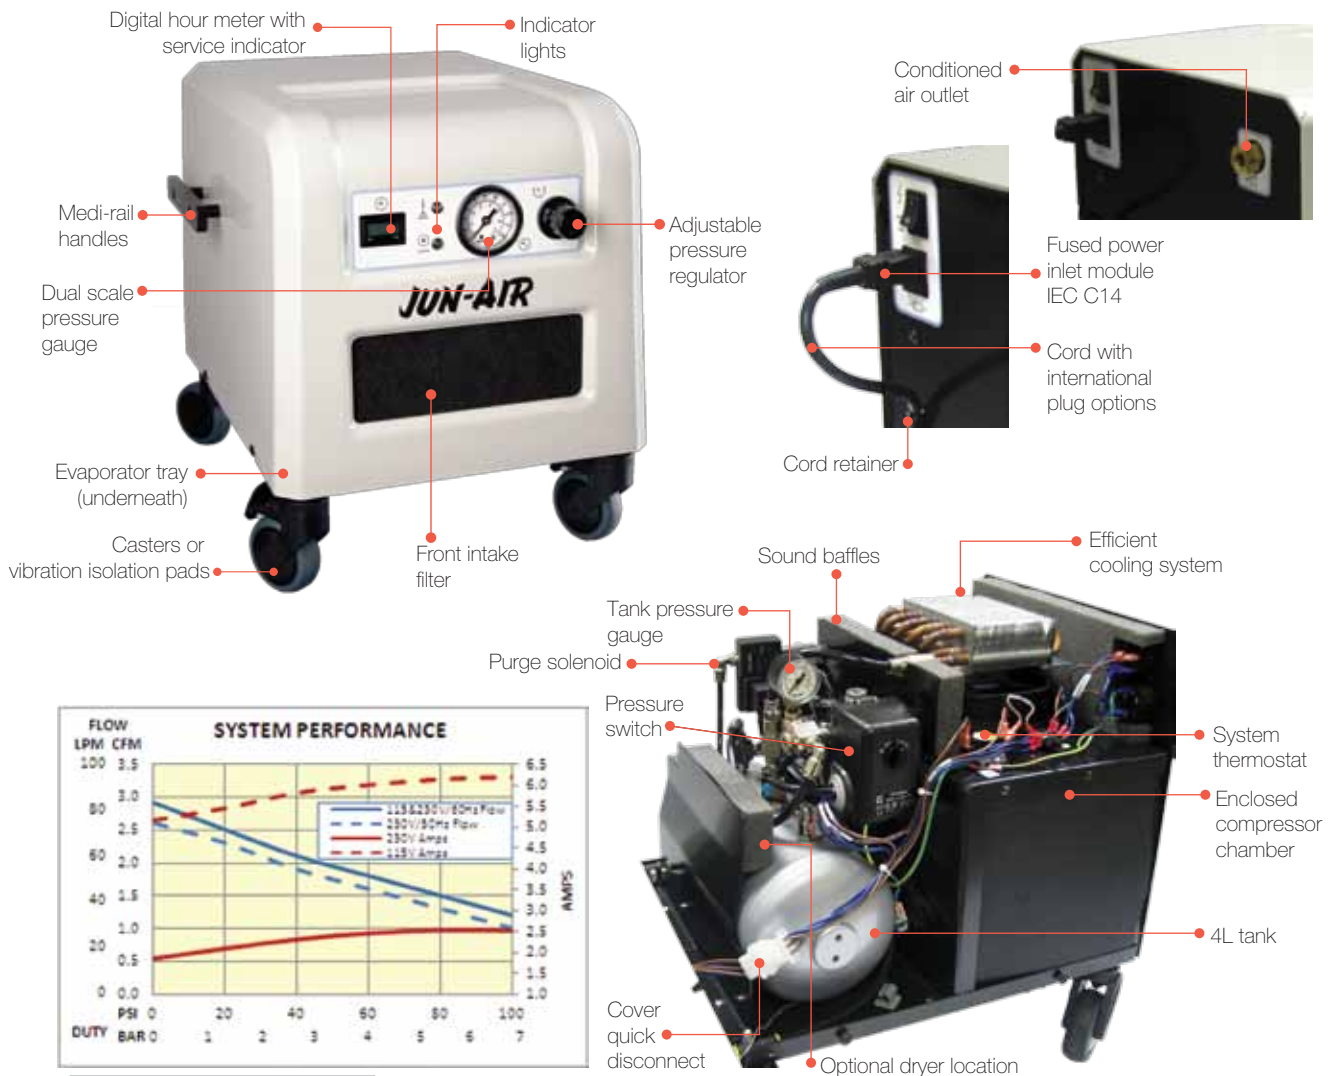

Key Features

Superior Performance

- 5 µm filtration (.01 µm coalescing filter optional)
- 2.0 CFM @ 40 PSI [55 LPM @ 3.0 Bar]
- Min. 5 °C dew point suppression @ 60 PSI in 40 °C and 95% RH (w/ optional dryer)
- 50 dBA avg sound level @ 100 PSI with optimized sound quality tones

Full Regulatory Compliance

- UL1450 listed and CSA 22.2 certified
- CE compliance to EU directives/EMC

Minimized Physical Footprint

- 17.5" L x 16" W x 14.5" H
- 65 pounds

Global Systems

- 115 V/60 Hz or 230 V/50-60 Hz
- Metric fasteners
- BSP fittings

Long life

- Latest Gast "Rocking Piston" compressor
- 2,000 hour filter replacement interval
- 8,000 hour compressor service interval
- Two-year system warranty
- Easy access to filter element cleaning/replacement

Purge drain evaporation system

- No unsightly drain bottle
- Antimicrobial element